





MB1S Grade 1 Cylindrical

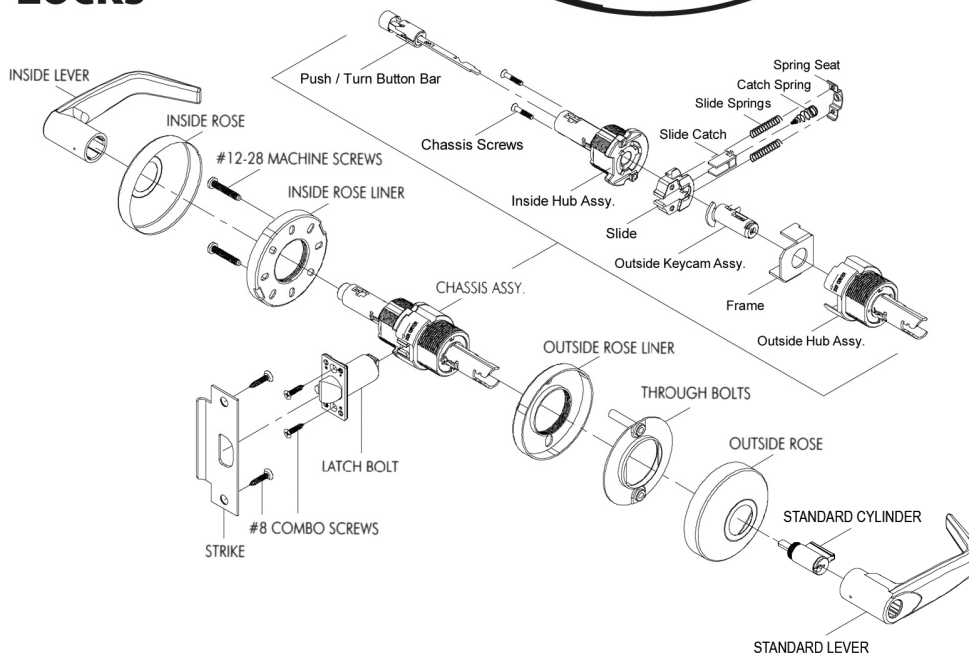

MB1S Series ANSI Grade 1 Extra Heavy Duty Lever Locks

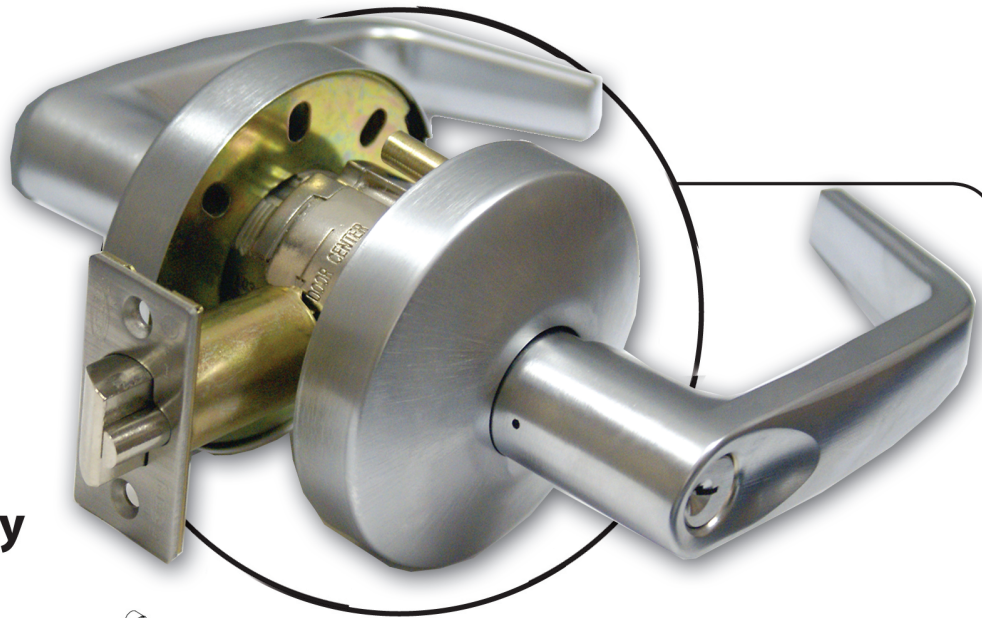

FEATURES:

- Heavy duty chassis, through bolt trim with various lever styles available.
- Strong cast and machined stainless steel hubs, mounted with heavy duty return springs.
- Tested to over one million cycles without visible lever sag.
- Heavier rose liner material provides greater attack resistance.
- Heat treated, heavy gauge cold rolled steel allows 1000 inch-pounds of torque to be applied to the locked lever without allowing access.
- Threaded inside and outside rose assembly adjustable for door thickness without removing keyed lever.

MB1S SERIES LEVER LOCKS

SPECIFICATIONS:

- Door Thickness** - 1-3/8" to 2" wood or metal door standard, 2-1/4" is available.
- Backset** - 2-3/4" standard; 2-3/8", 3-3/4" and 5" optional.
- Latchbolt** - 1/2" throw deadlatch, UL listed, self-adjusting faceplate; 3/4" throw fire door deadlatch available.
- Handing** - Non-handed.
- Strike** - S1 ANSI strike standard, S2 T strike optional.
- Lever Handles** - Solid zinc diecast levers, wrought brass roses, concealed screws. I/C core version standard.
- Door Preparation** - ANSI A115.2, through bolt installation.
- Standard Cylinder** - 6-pin standard, two keys per lock, compatible with Schlage® cylinders.
- Finishes** - 605, 606, 612, 613, 625 and 626.
- Certifications** - UL listed for "A" label (3 hour) single swinging door (4'x8'). ETL certified for ANSI/BHMA A156.2, Series 4000 Grade 1.
- Warranty** - SEVEN (7) YEAR manufacturer's limited warranty.

Lever Handles




14 Style

15 Style


16 Style

Cylinders



Standard Cylinder

Latches

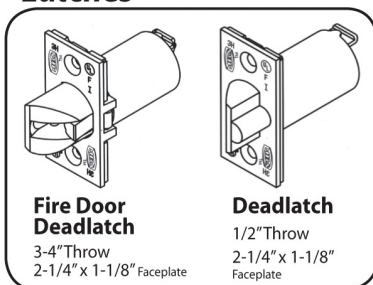


Fire Door Deadlatch

3-4" Throw
2-1/4" x 1-1/8" Faceplate

Deadlatch

1/2" Throw
2-1/4" x 1-1/8" Faceplate

Strikes




ANSI Strike (Std.) #S1

4-7/8" x 1-1/4"
Lip Length 1-1/4"

T-Strike (Opt.) #S2

2-1/4" x 1-1/8"
Lip Length 1-1/8"

Extension Links



3-3/4" Backset

5" Backset

Join appropriate extension link to 2-3/4" backset latch for required backset.

Certifications - UL Listed:

Listed by Underwriter's Laboratories for use on 3 Hr. A label single swinging doors (4'x8')
GYJT Builders Hardware-single point locks
American National Standard: ANSI A156.2, Series 4000 Grade 1 (formerly FF-H-106C Series T61)



Finish -	BHMA	US	Description
605	3		bright brass
606	4		satin brass
612	10		satin bronze
613	10B		oxidized satin bronze, oil rubbed
625	26		bright chromium plated
626	26D		satin chromium plated
629	US32		bright stainless steel
630	US32D		satin stainless steel

How To Order

Model Series	Backset	Function Code	Lever Handle	Finish	Strike	Options
MB1A	3	01	#14	626	S1	S1
MB1A Nonkeyed	2 - 2-3/8" 3 - 2-3/4"	See Function Chart	#14 #15 #16	605 606 612 613 625 626	S1 - ANSI Strike S2 - T Strike	AL - Abrasive Lever LL - Load Lined RQE - Request to Exit NOTE: Specify Inside (I), Outside (O), or Both (B) for AL option
MB1S Keyed						

If not specified at time of order, the default will be 2 3/4" backset, 15 Lever, 626 Finish, S1 Strike
MB1-093K drop-in door adaptor kit for Best 9K hole prep is available and sold separately.









The following items are purchased separately:

- S1-7/8-finish 7/8" flat lip strike (605, 606, 612, 613, 630)
- MB1-3/4-finish 3/4" throw fire door deadlatch (605, 606, 612, 613, 630)
- MB1-L4-3-3/4 Extension link for 3-3/4" backset latch
- MB1-L5-5 Extension link for 5" backset latch



MB1S Series Lever Locks









FUNCTIONS

	Description	Outside Lever		Inside Lever	
		Latched by	Locked by	Unlocked by	Locked by
Single Keyed Functions					
01 - Entrance AB F109 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever - only when the inside push button is out, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Pushing the inside button, OR Pushing and turning the inside button. Turning the button keeps the outside lever locked until the button is turned back. 	<ul style="list-style-type: none"> Turning the key in the outside lever, (only when the button is not turned) OR Rotating the inside lever, (only when the button is not turned), OR Closing the door (only when the button is not turned) 	Cannot be locked	Always unlocked
03 - Classroom R F84 	<ul style="list-style-type: none"> Rotating the inside lever, OR Turning the key in the outside lever OR Rotating the outside lever when not locked by key 	Turning the key in the outside lever	Turning the key in the outside lever	Cannot be locked	Always unlocked
05 - Storeroom D F86 	<ul style="list-style-type: none"> Turning the key in the outside lever, OR Rotating the inside lever 	Always locked	Cannot be unlocked	Cannot be locked	Always unlocked
T - Dormitory T F90 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever when not locked by key or push button 	<ul style="list-style-type: none"> Turning the key in the outside lever, OR Pushing the button on the inside lever 	<ul style="list-style-type: none"> Turning the key in the outside lever, OR Rotating the inside lever (only when locked by push button), OR Closing the door (only when locked by push button) 	Cannot be locked	Always unlocked
Double Keyed* Functions					
02 - Storeroom* G F91 	<ul style="list-style-type: none"> Rotating the outside lever, when not locked by key, OR Rotating the inside lever when not locked by key 	<ul style="list-style-type: none"> Turning the key in the inside lever, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Turning the key in the inside lever, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Turning the key in the inside lever, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Turning the key in the inside lever, OR Turning the key in the outside lever
04 - Communicating* S F80 	<ul style="list-style-type: none"> Turning the key in the inside lever, OR Turning the key in the outside lever, OR Rotating the inside or outside lever (if unlocked) 	Turning the key in the outside lever	Turning the key in the outside lever	Turning the key in the inside lever	Turning the key in the inside lever
TURNING THE KEY IN EITHER LEVER, LOCKS OR UNLOCKS ITS OWN LEVER INDEPENDENTLY.					
06 - Corridor C F88 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever when not locked by key, OR Turning the key in the outside lever 	Turning the key in the inside lever	Turning the key in the inside lever	Cannot be locked	Always unlocked
09 - Institutional* W F87 	<ul style="list-style-type: none"> Turning the key in the inside lever OR Turning the key in the outside lever 	Always locked	Cannot be unlocked	Always locked	Cannot be unlocked

*Attention: Locksets that secure both sides of the door are controlled by building codes and the Life Safety Codes. In an emergency situation, failure to quickly unlock the inside lever could be hazardous or even fatal.

FUNCTIONS

MB1S Series Lever Locks








	Description	Outside Lever		Inside Lever	
		Latched by	Locked by	Unlocked by	Locked by
Double Keyed* Functions (Continued)					
IN - Intruder IN 	<ul style="list-style-type: none"> Rotating inside lever, OR Rotating outside lever only when not locked by inside or outside key 	<ul style="list-style-type: none"> Turning key in the inside lever, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Turning key in the inside lever, OR Turning the key in the outside lever 	Cannot be locked	Always unlocked
Keyless Functions					
10 - Patio P F77 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when the inside push button is out 	Pushing the inside button	<ul style="list-style-type: none"> Rotating the inside lever, OR Closing the door 	Cannot be locked	Always unlocked
14 - Time Out TO 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when the inside push button is out 	Pushing and holding the inside button	Releasing the inside button	Cannot be locked	Always unlocked
20 - Privacy L F76 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when the inside push button is out 	Pushing the inside button	<ul style="list-style-type: none"> Rotating the outside slotted button, OR Rotating the inside lever, OR Closing the door 	Cannot be locked	Always unlocked
30 - Passage N F75 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever 	Cannot be locked	Always unlocked	Cannot be locked	Always unlocked
40 - Single Dummy Trim 1 DT 	This is a single, surface-mounted lever for an inactive door or a non-latching door.				
50 - Exit NX F89 	Rotating the inside lever	Always locked	Always locked	Cannot be locked	Always unlocked
60 - Exit Y 	Rotating the inside lever			Cannot be locked	Always unlocked

*Attention: Locksets that secure both sides of the door are controlled by building codes and the Life Safety Codes. In an emergency situation, failure to quickly unlock the inside lever could be hazardous or even fatal.



MB1S Series Lever Locks

FUNCTIONS

	Description	Outside Lever		Inside Lever	
		Locked by	Unlocked by	Locked by	Unlocked by
Electromechanical Functions					
DEL - Electrically Locked 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when the power is off, OR Turning the key in the outside lever 	<ul style="list-style-type: none"> Applying 24 Volts DC Outside lever remains locked only while power is on 	Switching off 24 Volts DC	Cannot be locked	Always unlocked
DEU - Electrically Unlocked 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when power is on, OR Turning the key in the outside lever 	Switching off 24 Volts DC	<ul style="list-style-type: none"> Applying 24 Volts DC Outside lever remains unlocked only while power is on 	Cannot be locked	Always unlocked
Special Functions					
07 - Dormitory or Storeroom A F81 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when inside turn button is unlocked position, OR Turning the key in the outside lever 	Turning the inside button	Turning the inside button	Cannot be locked	Always unlocked
21 - Hospital Privacy 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when inside push button is out 	Pushing the inside button	<ul style="list-style-type: none"> Turning the turn button in the outside lever, OR Rotating the inside lever, OR Closing the door. 	Cannot be locked	Always unlocked
00 - Office B F82 	<ul style="list-style-type: none"> Rotating the inside lever, OR Rotating the outside lever only when inside push button is out, OR Turning the key in the outside lever 	Pushing the inside button	<ul style="list-style-type: none"> Turning the key in the outside lever, OR Rotating the inside lever 	Cannot be locked	Always unlocked
63 - YD* 	Turning the key in the inside lever			Always fixed	Cannot be unlocked
63 - Exit* 	Turning the key in the inside lever, OR rotating the inside lever when not locked by key			Turning the key in the inside lever	Turning the key in the inside lever

*Attention: Locksets that secure both sides of the door are controlled by building codes and the Life Safety Codes. In an emergency situation, failure to quickly unlock the inside lever could be hazardous or even fatal.